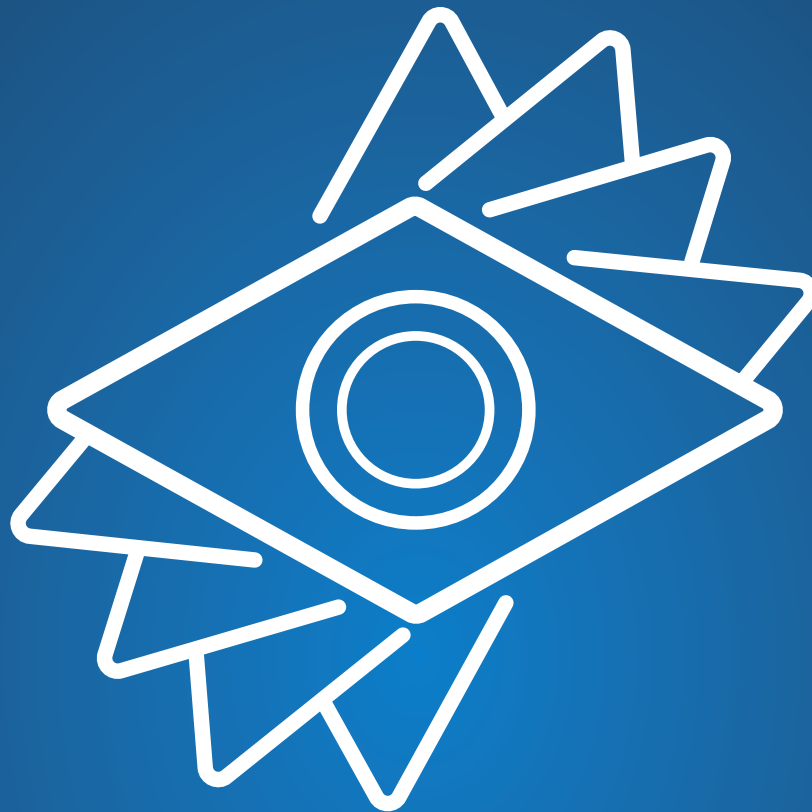
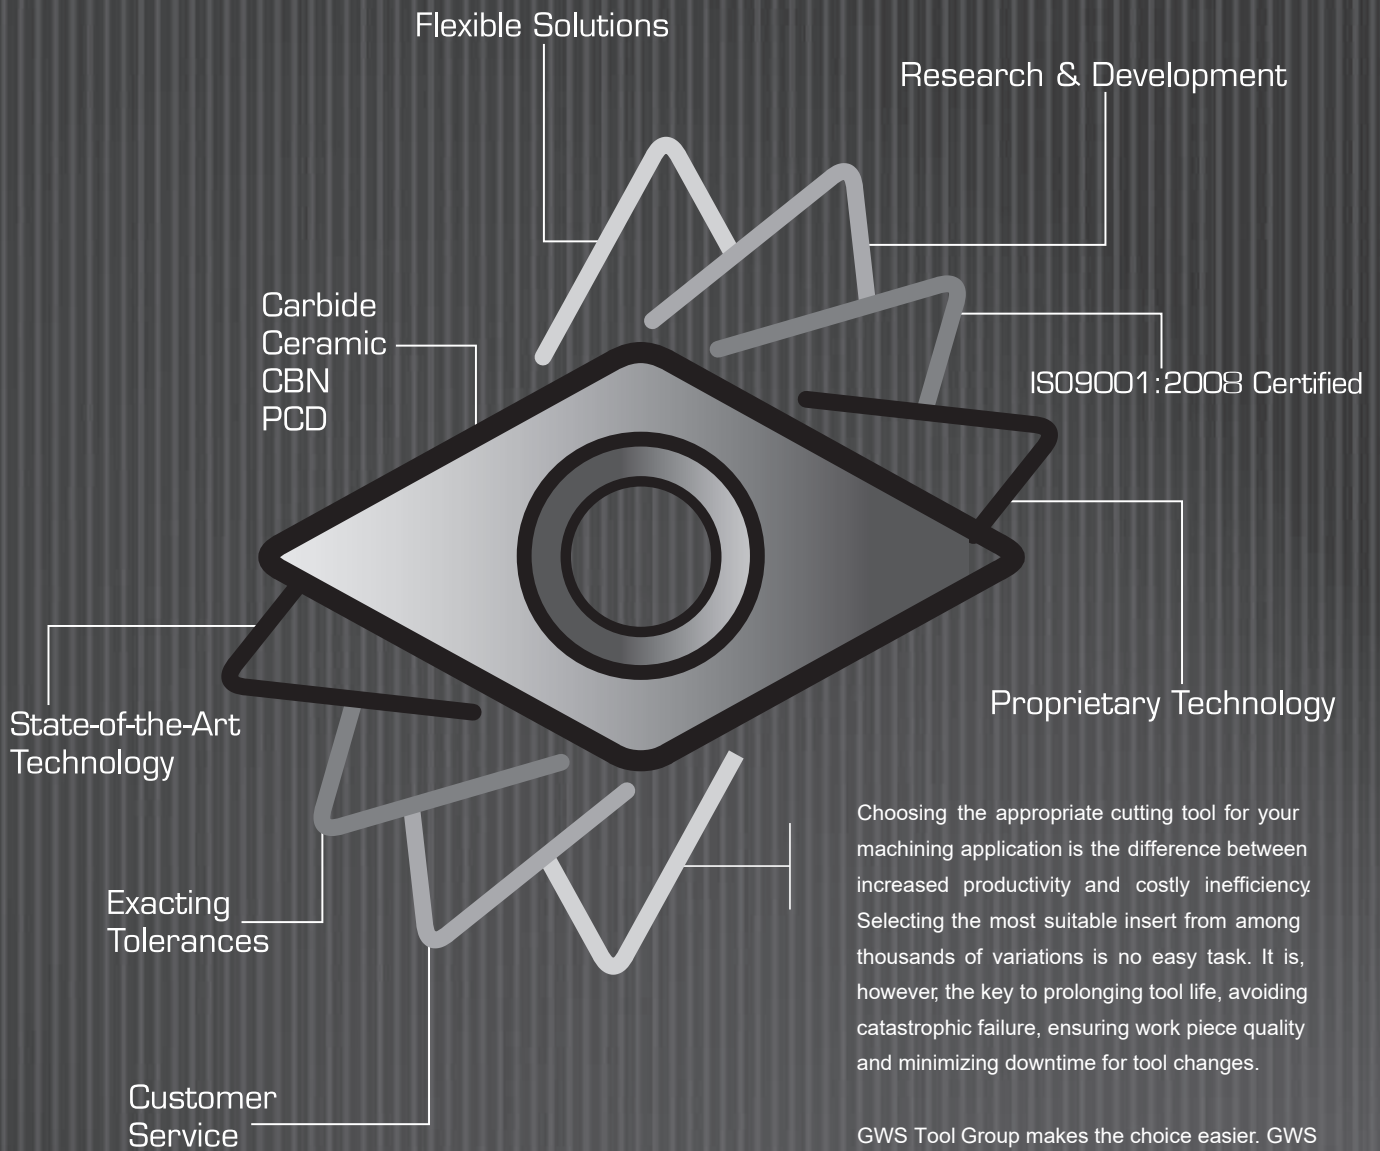




# PCD/PCBN INSERTS



POLYCRYSTALLINE DIAMOND AND CUBIC BORON NITRIDE INSERTS



Choosing the appropriate cutting tool for your machining application is the difference between increased productivity and costly inefficiency. Selecting the most suitable insert from among thousands of variations is no easy task. It is, however, the key to prolonging tool life, avoiding catastrophic failure, ensuring work piece quality and minimizing downtime for tool changes.

GWS Tool Group makes the choice easier. GWS has been dedicated to meeting the cutting tool needs of customers in industries as diverse as automotive, aerospace, electronic and heavy equipment manufacturing. Through our broad range of products, technical expertise, R & D capabilities and commitment to customer service, GWS Tool Group provides cost-effective, flexible solutions to any cutting challenge.

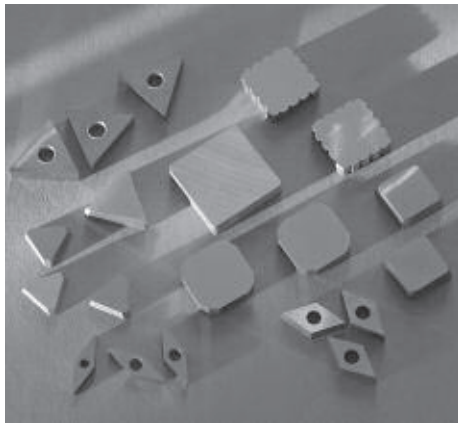
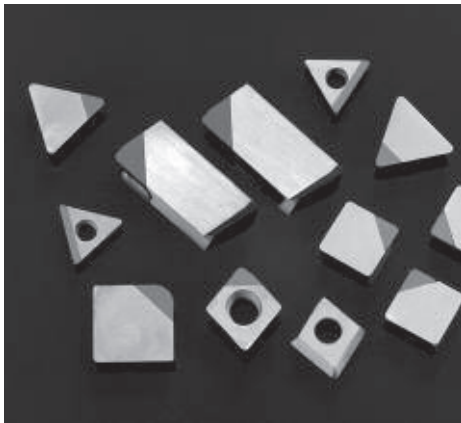
By utilizing advanced, proprietary technology, we manufacture precision ground inserts that provide consistent, increased productivity. An ISO9001:2008 registered company, GWS Tool Group is driven by an emphasis on quality in everything we do.



**GWS Tool Group** offers a broad range of cutting tool materials to meet your machining needs. Whether your production systems involve hard turning or milling, require heavy roughing or high speed finishing, machine high silica aluminum or tough superalloys, we have the product.

**Our carbide** inserts offer a cost-effective solution for general purpose machining as well as a number of special applications. With a wide variety of grades, chipbreakers and coatings, you'll find the tool best suited to your application.

**The GWS Tool Group** line of **CBN** tooling (cubic boron nitride) offers great hardness and abrasion resistance, coupled with extreme chemical stability when in contact with ferrous alloys at high temperatures. It has the ability to machine both steels and cast irons at high speeds for long operating cycles.



**GWS Tool Group's** family of five **PCD** (polycrystalline diamond) grades can satisfy all of your nonferrous and non-metallic machining needs, from the roughest and most conditions and materials to the tightest tolerance and smoothest surface finish requirements. Our PCD inserts deliver maximum productivity.

**Made** from the finest powders in the world, using proprietary technology, **GWS** manufactures one of the strongest, wear resistant **ceramics**. A patented microwave sintering process produces a very fine-grained micro-structure with enhanced hardness, toughness and high temperature strength. Called **MicroWear**, this family of ceramics can machine a broad range of materials from the hardest cast irons to the toughest high-temperature alloys.

**Engineered** and manufactured using state-of-the-art technology, all of our inserts are of exceptional detail and exacting precision. So when you're looking for quality and increased productivity, look no further than **GWS Tool Group**.

# TABLE OF CONTENTS



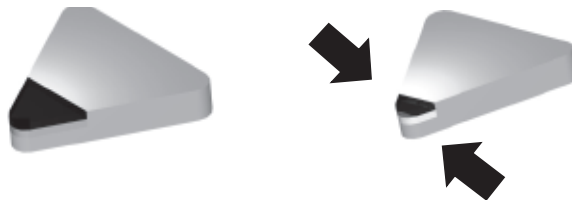
<b>RECONDITIONING OF INSERTS AND CARTRIDGES</b>	<b>PAGE 1</b>
<b>PCD/PCBN INFORMATION</b>	<b>PAGES 2-7</b>
<b>NOMENCLATURE</b>	<b>PAGES 8-9</b>
<b>SINGLE TIPPED INSERTS</b>	<b>PAGES 10-12</b>
<b>FULL TOP INSERTS</b>	<b>PAGES 13-14</b>
<b>SOLID INSERTS</b>	<b>PAGES 15-16</b>
<b>CARTRIDGE INSERTS</b>	<b>PAGES 17-18</b>
<b>DOUBLE TIPPED INSERTS</b>	<b>PAGE 18</b>

# PCD/PCBN

## RELAP/RESIZE/RETIPPING OF PCD/PCBN INSERTS AND CARTRIDGES

### RELAPPING

This is accomplished by using CNC grinding technology to obtain the correct cutting edge quality desired. Insert or cartridge is reduced in size, and, if more than .015"(.381MM) needs to be ground, the tool will be rejected. It may be reconditioned using another of Indexable's PCD/PCBN reconditioning processes if applicable. This is by far the most economical process available.



### RESIZING

Resizing the insert or cartridge is accomplished by removing the segment, preparing the pocket, and inserting a shim between the body and segment. This allows the tool to be returned to its original size, through CNC grinding technology. If more than .020"(.508MM) has to be removed, the tip is not acceptable, and must be retipped. If resizing is a viable option, it allows for an economical way to return the tooling to like-new standards.



### RETIPPING

Once the tool can't be relapped or resized, retipping the tool becomes an option. Retipping allows the body of the insert to be retained, and a new PCD/PCBN tip is applied, CNC ground and returned to new tool quality and standards. Retipping is also an option when the segment has suffered severe fracture, but the tool body is not damaged.



# PCD/PCBN

**POLYCRYSTALLINE  
DIAMOND  
(PCD)**

**POLYCRYSTALLINE  
CUBIC BORON NITRIDE  
(PCBN)**



## **NON-FERROUS APPLICATIONS**

**ALUMINUM ALLOYS**  
PISTONS  
WHEELS  
GEARBOXES  
BRAKE CYLINDERS

**COPPER ALLOYS**  
COPPER  
ENGINE BEARINGS  
BUSHINGS  
PUMP SEATS

**HIGHLY ABRASIVE MATERIALS**  
INDUSTRIAL CERAMICS  
SINTERED CERAMICS  
ALUMINUM OXIDE  
SPARK PLUG INSULATORS

**FIBRE PRODUCTS**  
CARBON FIBRE  
FIBREGLASS  
REENFORCED GRAPHITE  
ACRYLIC PLASTICS  
PHENOLIC PLASTICS

**WOOD AND STONE**  
FIBREBOARD  
PLYWOOD  
MELANIMIC PANELS  
GRANITE  
SANDSTONE

## **FERROUS APPLICATIONS**

**HARD CAST IRON**  
PUMPS  
IMPELLER  
SHAFTS

**SOFT CAST IRON**  
ENGINE BLOCKS  
BRAKE ROTORS  
BRAKE DRUMS  
CLUTCH PLATES

**SINTERED IRON**  
VALVE SEATS  
CAM SHAFTS  
GEARS

**HARDENED STEELS**  
PINION GEARS  
SIDE GEARS  
TRANSMISSION  
SHAFTS  
BEARINGS

**SUPERALLOYS**  
TURBINE DISK  
TURBINE BLADE  
TURBINE  
SHROUDS  
ENGINE SHAFTS  
TURBINE VANES

FOR APPLICATION OF PCD/PCBN GRADES SEE PAGES 5-6, FOR COMPARISON TO OTHER  
MANUFACTURERS GRADES, SEE PAGE 7.

# PCD/PCBN

## PCD CUTTING RECOMMENDATIONS

MATERIAL	SPEED (SF/M)	DOC	FEED
ALUMINUM <12%	1000-6000	.002-.125	.004-.015
ALUMINUM <18%	500-2500	.002-.125	.002-.010
COPPER	1200-3500	.005-.100	.005-.020
BRASS	1200-3500	.005-.125	.005-.020
SINTERED CARBIDE	40-90	.005-.125	.004-.020
UNSINTERED CARBIDE	400-1200	.005-.100	.004-.025
PRESSED CERAMICS	200-800	.001-.005	.001-.005
FIBREGLASS	300-9000	.005-.020	.001-.010
NYLONS AND ACRYLICS	550-10000	.002-.100	.005-.020
HARD RUBBER	550-2500	.005-.125	.004-.020

## PCBN CUTTING RECOMMENDATIONS

CARBON STEEL	200-500	.008	.020
BEARING MATERIAL	200-500	.008	.020
ALLOY STEELS	200-500	.008	.020
TOOL/DIE STEEL	160-350	.008	.020
HIGH TENSILE CAST IRONS	200-500	.060	.020
CHILLED CAST IRON	130-260	.032	.020
GREY CAST IRON	2000-4000	.020	.020
POWERED METAL	500-650	.016	.020
INCONEL	500-650	.006	.020
RENE42	500-650	.006	.020
RENE 77	450-550	.006	.020
INCOLOY	750-900	.006	.020
MONEL	550-650	.006	.020

FOR APPLICATION OF PCD/PCBN GRADES SEE PAGES 5-6, FOR COMPARISON TO OTHER MANUFACTURERS GRADES, SEE PAGE 7.

# PCBN

## GRADE INFORMATION AND APPLICATIONS

Grade	TYPE	CBN (VOL.%)	GRAIN SIZE	MAJOR BINDER	APPLICATION
CBN 45	CARBIDE BACKED	45	<1	TITANIUM NITRIDE	-Low thermal conductivity -Strong edge due to low edge compressiveness
CBN 50	CARBIDE BACKED	50	2	TITANIUM CARBIDE	-Good thermal stability and crater resistance -High-speed continuous machining of hardened steel
CBN 60	CARBIDE BACKED	60	2	TITANIUM NITRIDE	-Combination of wear resistance and impact strength -General usage in continuous and interrupted cutting of hardened steel
CBN 70	CARBIDE BACKED	70	2	TITANIUM CARBONITRIDE	-High degree of toughness due to fine microstructure of CBN and ceramic binder -Rough and interrupted machining of hardened steel
CBN 80	CARBIDE BACKED	80	3	TITANIUM NITRIDE	-Combination of wear resistance and thermal properties -Superior to other grades in machining superalloy
CBN 90	CARBIDE BACKED	90	3	TITANIUM NITRIDE	-Higher toughness and heat resistance as an alternative to CBN 95 -Machining non-homogenous cast iron and power metal alloys
CBN 95	CARBIDE BACKED	95	3	TITANIUM ALLOY	-Extreme wear resistance due to high content CBN and metal binder -Excellent at machining various cast irons
CBN 100	SOLID FORM	93	10	ALUMINUM NITRIDE	-Extreme wear resistance due to coarser CBN and high content -Rough machining of cast iron and power metal alloys

FOR COMPARISON TO OTHER MANUFACTURERS GRADES, SEE PAGE 7.

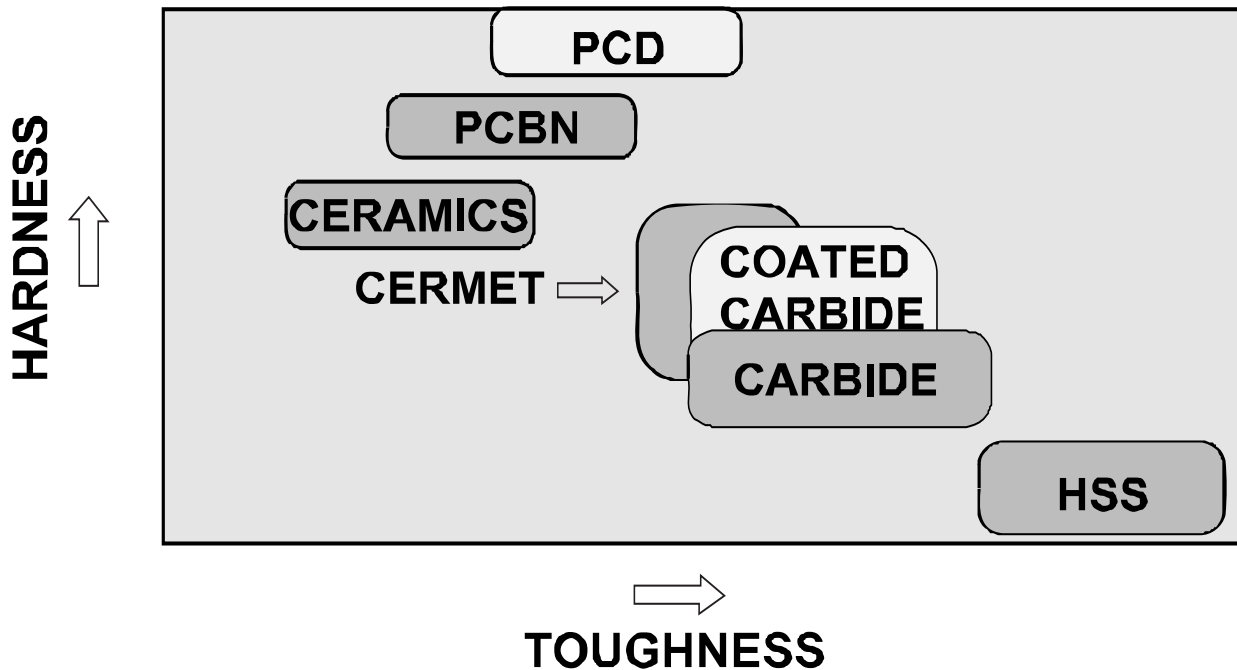


# PCD

## GRADE INFORMATION AND APPLICATIONS

Grade	TYPE	PCD (VOL.%)	GRAIN SIZE	MAJOR BINDER	APPLICATION
PCD	CARBIDE BACKED	92	10	CO	-GENERAL PURPOSE GRADE -GOOD SURFACE FINISH -GOOD WEAR RESISTANCE
PCD3	CARBIDE BACKED	94	30	CO	-SUPERIOR WEAR RESISTANCE -STRONG DIAMOND BOND
PCD-F	CARBIDE BACKED	90	4	CO	-GOOD SURFACE FINISHING
PCD-UF	CARBIDE BACKED	90	2	CO	-EXCELLENT SURFACE FINISH
PCD-XUF	CARBIDE BACKED	90	0.5	CO	-EXCELLENT SURFACE FINISH -GOOD WEAR RESISTANCE -SUITED FOR WOODWORKING APPLICATIONS

## CUTTING TOOL MATERIALS



FOR COMPARISON TO OTHER MANUFACTURERS GRADES, SEE PAGE 7.








## PCD-GRADE COMPARISON CHART

GRAIN SIZE	PARTICLE	GWS TOOL GROUP	GE	E6	SUMITOMO	TOMEI	MEGADIAMOND
COARSE	50				DA90		
	30	PCD 3		CTM302		TDC-E	C30X
	25		COMPAX1800	CTH025			
			COMPAX1500	CTB025			
MEDIUM	12					TDC-H	
	10	PCD		CTB010			M10
	8						
	7					TDC-S	
	5		COMPAX1300		DA150		F05/HM20
FINE	4	PCD-F	COMPAX 1600				
	3					TDC-G	
	2	PCD-UF		CTB002			
				CTC002			
	1					TDC-F	
	0.5	PCD-XUF			DA200	98FIIM	
					DA2200		

## PCBN-GRADE COMPARISON CHART

	TOOL MAKER										MATERIAL MAKER		
	GWS TOOL GROUP	SUMITOMO	MEGA	MITSUBISHI	TOSHIBA	SECO	DIJET	KYOCERA	KENNA-METAL	SPK	DI	E6	SHOWA DENKO
CAST IRON/NI-HARD/ SUPERALLOY													
SOLID TYPE	CBN100	BNS800	N100	MB940		CBN300	JBN10	KBN900		WBN100	BZN7000S	AMB90	
GENERAL MACHINING	CBN95	BN600	N90	MB710	BX950	CBN300 CBN20	JBN500	KBN60G	KD120	WBN100	BZN6000	DBA80	KT10
↓	CBN80 CBN80D	BN600 BN100	N90	MB710 MB730	BX950 BX850	CBN300 CBN20	JBN500	KBN60G	KD200	WBN750	BZN6000	DBA80	KT10 KT10C
HARD MACHINING	CBN95 CBN90	BN500	N90	MB730	BX950 BX930 BX450	CBN300	JBN500	KBN60G	KD200	WBN700	BZN6000	DBA80	KT20C
HARDENED STEEL													
INTERRUPTED CUTTING	CBN45	BN300		MB835	BX380	CBN150			KD200	WBN500			
↓	CBN60 CBN70	BN250 BNX25	N50	MB835 MB825	BX380 BX360	CBN150	JBN300	KBN25B	KD200	WBN550	BZN8100 BZN8200	DBN45	KT30X KT25
↓	CBN60 CBN70	BN250 BNX20	N50	MB825 MB820 MB8025	BX360 BX330	CBN10 CBN100	JBN300 JBN330	KBN25B KBN10B	KD05	WBN600	BZN8100 BZN8200	DBN45	KT30N KT30
CONTINUOUS CUTTING	CBN50	BNX10 BNC80	NT50	MB810 MB8025	BX310	CBN10 CBN100	JBN330	KBN10B	KD05	WBN650	HTC2000	DBC50	

For application of grades, see pages 5-6

SIZE									
							I.C. (MM)	I.C. (INCH)	ANSI SYMBOL
03		04	S4	03	06	03	3,97	0.156	1.25
04	08	05	04	04	08	04	4,76	0.188	1.5
05	09	06	05	05	09	05	5,56	0.219	1.8
06	11*	06					6,00		
06*	11	07	06	06	11	06	6,35	0.250	2
07	13	09	08	07	13	07	7,94	0.313	2.5
08*							8,00		
09	16	11	09	09	16	09	9,525	0.375	3
10*							10,00		
12*							12,00		
12	22	15	12	12	22	12	12,70	0.500	4
15		19	16	15	27	15	15,875	0.625	5
16							16,00		
19	33	23	19	19	33	19	19,05	0.750	6
20*							20,00		
	38	27	22	22	38	22	22,225		
25*							25,00		
25	44	31	25	25	44	25	25,40	1.000	8
31		38	32	31	53	31	31,75	1.250	10
32							32,00		

THICKNESS			
ISO	MM	ANSI	INCH
01	1,59	1	0.062
T1	1,98	1.2	0.078
02	2,38	1.5	0.094
03	3,18	2	0.125
T3	3,97	2.5	0.156
04	4,76	3	0.188
05	5,56	3.5	0.219
06	6,35	4	0.250
07	7,94	5	0.313
09	9,52	6	0.375
12	12,7	8	0.500







Rectangles and parallelograms use a 2 digits to size:  
1<sup>st</sup> digit-Number of 1/8ths inch in width  
2<sup>nd</sup> digit-Number of 1/4 inches in length

<b>22</b>	<b>04</b>	<b>08</b>	<b>E</b>
SIZE	THICKNESS	RADIUS	OTHER CONDITIONS
<b>4</b>	<b>3</b>	<b>2</b>	<b>E</b>

RADIUS			
ISO	MM	ANSI	INCH
00	SHARP EDGE	0	SHARP EDGE
02	0.2	0.5	0.008
04	0.4	1	0.016
08	0.8	2	0.031
12	1.2	3	0.047
16	1.6	4	0.062
20	2	5	0.078
24	2.4	6	0.094
28	2.78	7	0.109
32	3.18	8	0.125
00	ROUND INSERT	0	ROUND INSERT

OTHER CONDITIONS
A -Light hone
B -Medium hone
C -Heavy hone
D -Ground top and bottom only- Heavy hone
E -Unground insert honed
F -Unground insert not honed
J -Polished(rake face only)
T - T-Land
FA -Finishing application
SA -Standard application

# SINGLE TIPPED INSERTS







CCMW	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H	R	
	CCMW 21.51	0.250	0.094	0.110	0.016	CCMW 06 02 04
	CCMW 21.52				0.032	CCMW 06 02 08
	CCMW 32.51	0.375	0.156	0.173	0.016	CCMW 09 T3 04
	CCMW 32.52				0.032	CCMW 09 T3 08
	CCMW 431	0.500	0.188	0.216	0.016	CCMW 12 04 04
	CCMW 432				0.032	CCMW 12 04 08
CPMW		I.C.	T	H	R	
	CPMW 21.51	0.250	0.094	0.110	0.016	CPMW 06 02 04
	CPMW 21.52				0.032	CPMW 06 02 08
	CPMW 32.51	0.375	0.156	0.173	0.016	CPMW 09 T3 04
	CPMW 32.52				0.032	CPMW 09 T3 08
	CPMW 431	0.50	0.188	0.216	0.016	CPMW 12 04 04
	CPMW 432				0.032	CPMW 12 04 08
CNGA		I.C.	T	H	R	
	CNGA 431	0.500	0.188	0.203	0.016	CNGA 12 04 04
	CNGA 432				0.032	CNGA 12 04 08
	CNGA 433				0.047	CNGA 12 04 12
DCMW		I.C.	T	H	R	
	DCMW 21.51	0.250	0.094	0.110	0.016	DCMW 07 02 04
	DCMW 21.52				0.032	DCMW 07 02 08
	DCMW 32.51	0.375	0.156	0.173	0.016	DCMW 11 T3 04
	DCMW 32.52				0.032	DCMW 11 T3 08
DPMW		I.C.	T	H	R	
	DPMW 21.51	0.250	0.094	0.110	0.016	DPMW 07 02 04
	DPMW 21.52				0.032	DPMW 07 02 08
	DPMW 32.51	0.375	0.156	0.173	0.016	DPMW 11 T3 04
	DPMW 32.52				0.032	DPMW 11 T3 08
DNGA (DNMA)		I.C.	T	H	R	
	DNGA 431	0.500	0.188	0.203	0.016	DNGA 15 04 04
	DNGA 432				0.032	DNGA 15 04 08

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)

PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45

NOTE: Segment size varies based on depth of cut and/or customers' request







# SINGLE TIPPED INSERTS

SNGA (SNMA)	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H	R	
	SNGA 431	0.500	0.188	0.203	0.016	SNGA 12 04 04
	SNGA 432				0.032	SNGA 12 04 08
	SNGA 433				0.047	SNGA 12 04 12
SNGN		I.C.	T		R	
	SNGN 431	0.500	0.188		0.016	SNGN 12 04 04
	SNGN 432				0.032	SNGN 12 04 08
	SNGN 433				0.047	SNGN 12 04 12
SPGN		I.C.	T		R	
	SPGN 431	0.500	0.188		0.016	SPGN 12 04 04
	SPGN 432				0.032	SPGN 12 04 08
	SPGN 433				0.047	SPGN 12 04 12
TCGW (TCMW)		I.C.	T	H	R	
	TCGW 1.81.51	0.219	0.094	0.118	0.016	TCGW 09 02 04
	TCGW 21.51	0.250	0.094	0.110	0.016	TCGW 11 02 04
	TCGW 21.52				0.032	TCGW 11 02 08
	TCGW 32.51	0.375	0.156	0.173	0.016	TCGW 16 T3 04
	TCGW 32.52				0.032	TCGW 16 T3 08
TPGW (TPMW)		I.C.	T	H	R	
	TPGW 1.81.51	0.219	0.094	0.118	0.016	TPGW 09 02 04
	TPGW 21.51	0.250	0.094	0.110	0.016	TPGW 11 02 04
	TPGW 21.52				0.032	TPGW 11 02 08
	TPGW 32.51	0.375	0.156	0.173	0.016	TPGW 16 T3 04
	TPGW 32.52				0.032	TPGW 16 T3 08
TNG		I.C.	T		R	
	TNG 221	0.250	0.125		0.016	TNGN 11 03 04
	TNG 222				0.032	TNGN 11 03 08
	TNG 321	0.375	0.125		0.016	TNGN 16 03 04
	TNG 322				0.032	TNGN 16 03 08
	TNG 331		0.188		0.016	TNGN 16 04 04
	TNG 332				0.032	TNGN 16 04 08
	TNG 431	0.500	0.188		0.016	TNGN 22 04 04
	TNG 432				0.032	TNGN 22 04 08
	TNG 433				0.047	TNGN 22 04 12

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)







PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													

# SINGLE TIPPED INSERTS

TNMA	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H	R	
	TNMA 331	0.375	0.188	0.125	0.016	TNMA 16 04 04
	TNMA 332				0.032	TNMA 16 04 08
	TNMA 431	0.500	0.188	0.203	0.016	TNMA 22 04 04
	TNMA 432				0.032	TNMA 22 04 08
	TNMA 433				0.047	TNMA 22 04 12
VBMW		I.C.	T		R	
	VBMW 21.51	0.250	0.094		0.016	VBMW 11 02 04
	VBMW 331	0.375	0.188		0.016	VBMW 16 04 04
	VBMW 332	0.375	0.188		0.032	VBMW 16 04 08
VCMW		I.C.	T		R	
	VCMW 21.51	0.250	0.094		0.016	VCMW 11 02 04
	VCMW 331	0.375	0.188		0.016	VCMW 16 04 04
	VCMW 332	0.375	0.188		0.032	VCMW 16 04 08
VPMW		I.C.	T		R	
	VPMW 21.51	0.250	0.094		0.016	VPMW 11 02 04
	VPMW 331	0.375	0.188		0.016	VPMW 16 04 04
	VPMW 332	0.375	0.188		0.032	VPMW 16 04 08
VNMA		I.C.	T	H	R	
	VNMA 331	0.375	0.188	0.150	0.016	VNMA 16 04 04
	VNMA 332				0.032	VNMA 16 04 08
WNMA		I.C.	T	H	R	
	WNMA 431	0.500	0.188	0.203	0.016	WNMA 08 04 04
	WNMA 432				0.032	WNMA 08 04 08

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)													
PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													




# FULL TOP PCBN INSERTS

CNGA	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H		
	CNGA 431	0.500	0.188	0.203	0.016	CNGA 12 04 04
	CNGA 432				0.032	CNGA 12 04 08
	CNGA 433				0.047	CNGA 12 04 12
	CNGA 434				0.062	CNGA 12 04 16
CNGN		I.C.	T	R		
	CNGN 321	0.375	0.125	0.016		CNGN 09 03 04
	CNGN 322			0.032		CNGN 09 03 08
	CNGN 431	0.500	0.188	0.016		CNGN 12 04 04
	CNGN 432			0.032		CNGN 12 04 08
	CNGN 433			0.047		CNGN 12 04 12
DNGA		I.C.	T	R		
	DNGA 431	0.500	0.188	0.016		DNGA 12 04 04
	DNGA 432			0.032		DNGA 12 04 08
	DNGA 433			0.047		DNGA 12 04 12
	DNGA 434			0.062		DNGA 12 04 16
RNG		I.C.	T	R		
	RNG 22	0.250	0.125	-		RNGN 06 03 00
	RNG 32	0.375	0.125	-		RNGN 09 03 00
	RNG 42	0.500	0.125	-		RNGN 12 03 00
	RNG 43		0.188	-		RNGN 12 04 00
RNGA		I.C.	T	H		
	RNGA 43	0.500	0.188	0.203		RNGA 12 04 00
	RNGA 53	0.625	0.188	0.25		RNGA 15 04 00
	RNGA 83	1.000	0.188	0.359		RNGA 25 04 00
SNG		I.C.	T	R		
	SNG 321	0.375	0.125	0.016		SNGN 09 03 04
	SNG 322			0.032		SNGN 09 03 08
	SNG 431	0.500	0.188	0.016		SNGN 12 04 04
	SNG 432			0.032		SNGN 12 04 08
	SNG 433			0.047		SNGN 12 04 12
	SNG 434			0.062		SNGN 12 04 16

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)

PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													







# FULL TOP PCBN INSERTS

SNGA	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H	R	
	SNGA 431	0.500	0.188	0.203	0.016	SNGA 12 04 04
	SNGA 432				0.032	SNGA 12 04 08
	SNGA 433				0.047	SNGA 12 04 12
	SNGA 434				0.062	SNGA 12 04 16
	SNGA 832	1.000	0.188	0.359	0.032	SNGA 25 04 08
	SNGA 833				0.047	SNGA 25 04 12
	SNGA 834				0.062	SNGA 25 04 16
TNG		I.C.	T	R		
	TNG 221	0.250	0.125	0.016	TNGN 11 03 04	
	TNG 222			0.032	TNGN 11 03 08	
	TNG 321	0.375	0.125	0.016	TNGN 16 03 04	
	TNG 322			0.032	TNGN 16 03 08	
	TNG 331		0.188	0.016	TNGN 16 04 04	
	TNG 332			0.032	TNGN 16 04 08	
	TNG 432	0.500	0.188	0.032	TNGN 22 04 08	
	TNG 433			0.047	TNGN 22 04 12	
TNGA		I.C.	T	R		
	TNGA 331	0.375	0.188	0.016	TNGA 16 04 04	
	TNGA 332			0.032	TNGA 16 04 08	
	TNGA 333			0.047	TNGA 16 04 12	

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)													
PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													






# SOLID PCBN INSERTS

CNGA	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H	R	
	CNGA 431	0.500	0.188	0.203	0.016	CNGA 12 04 04
	CNGA 432				0.032	CNGA 12 04 08
	CNGA 433				0.047	CNGA 12 04 12
	CNGA 434				0.062	CNGA 12 04 16
CNGN		I.C.	T		R	
	CNGN 321	0.375	0.125		0.016	CNGN 09 03 04
	CNGN 322				0.032	CNGN 09 03 08
	CNGN 431	0.500	0.188		0.016	CNGN 12 04 04
	CNGN 432				0.032	CNGN 12 04 08
	CNGN 433				0.047	CNGN 12 04 12
DNGA		I.C.	T		R	
	DNGA 431	0.500	0.188		0.016	DNGA 12 04 04
	DNGA 432				0.032	DNGA 12 04 08
	DNGA 433				0.047	DNGA 12 04 12
	DNGA 434				0.062	DNGA 12 04 16
RNG		I.C.	T		R	
	RNG 22	0.250	0.125		-	RNGN 06 03 00
	RNG 32	0.375	0.125		-	RNGN 09 03 00
	RNG 42	0.500	0.125		-	RNGN 12 03 00
	RNG 43		0.188		-	RNGN 12 04 00
RNGA		I.C.	T		H	
	RNGA 43	0.500	0.188		0.203	RNGA 12 04 00
	RNGA 53	0.625	0.188		0.25	RNGA 15 04 00
	RNGA 83	1.000	0.188		0.359	RNGA 25 04 00
SNG		I.C.	T		R	
	SNG 321	0.375	0.125		0.016	SNGN 09 03 04
	SNG 322				0.032	SNGN 09 03 08
	SNG 431	0.500	0.188		0.016	SNGN 12 04 04
	SNG 432				0.032	SNGN 12 04 08
	SNG 433				0.047	SNGN 12 04 12
	SNG 434				0.062	SNGN 12 04 16

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)

PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													

# SOLID PCBN INSERTS

SNGA	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H	R	
	SNGA 431	0.500	0.188	0.203	0.016	SNGA 12 04 04
	SNGA 432				0.032	SNGA 12 04 08
	SNGA 433				0.047	SNGA 12 04 12
	SNGA 434				0.062	SNGA 12 04 16
	SNGA 832	1.000	0.188	0.359	0.032	SNGA 25 04 08
	SNGA 833				0.047	SNGA 25 04 12
	SNGA 834				0.062	SNGA 25 04 16
TNG		I.C.	T	R		
	TNG 221	0.250	0.125	0.016	TNGN 11 03 04	
	TNG 222			0.032	TNGN 11 03 08	
	TNG 321	0.375	0.125	0.016	TNGN 16 03 04	
	TNG 322			0.032	TNGN 16 03 08	
	TNG 331		0.188	0.016	TNGN 16 04 04	
	TNG 332			0.032	TNGN 16 04 08	
	TNG 432	0.500	0.188	0.032	TNGN 22 04 08	
	TNG 433			0.047	TNGN 22 04 12	
TNGA		I.C.	T	R		
	TNGA 331	0.375	0.188	0.016	TNGA 16 04 04	
	TNGA 332			0.032	TNGA 16 04 08	
	TNGA 333			0.047	TNGA 16 04 12	

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)													
PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													

# CARTRIDGE INSERTS


SDR-100	INSERT NUMBER	DIMENSIONS					
		L	T	W	R	EDGE LENGTH	
	SDR-100-020-E1	0.875	0.250	0.375	0.020	0.250	
	SDR-100-020-E3					0.500	
	SDR-100-020-E5					0.750	
	SDR-100-031-E1				0.031	0.250	
	SDR-100-031-E3					0.500	
	SDR-100-031-E5					0.750	
SDL-200		DIMENSIONS					
		L	T	W	R	EDGE LENGTH	
	SDL-200-020-E1	0.875	0.25	0.375	0.020	0.250	
	SDL-200-020-E3					0.500	
	SDL-200-020-E5					0.750	
	SDL-200-031-E1				0.031	0.250	
	SDL-200-031-E3					0.500	
	SDL-200-031-E5					0.750	
SDR-102		DIMENSIONS					
		L	T	W	R	WIPER	EDGE LENGTH
	SDR-102-020-E1W1	0.875	0.250	0.375	0.020	0.020	0.250
	SDR-102-020-E3W1						0.500
	SDR-102-020-E5W1						0.750
	SDR-102-031-E1W1				0.030	0.020	0.250
	SDR-102-031-E3W1						0.500
	SDR-102-031-E5W1						0.750
	SDR-102-020-E1W2	0.875	0.250	0.375	0.020	0.030	0.250
	SDR-102-020-E3W2						0.500
	SDR-102-020-E5W2						0.750
	SDR-102-031-E1W2				0.030	0.030	0.250
	SDR-102-031-E3W2						0.500
	SDR-102-031-E5W2						0.750
SDL-202		DIMENSIONS					
		L	T	W	R	WIPER	EDGE LENGTH
	SDL-202-020-E1W1	0.875	0.250	0.375	0.020	0.020	0.250
	SDL-202-020-E3W1						0.500
	SDL-202-020-E5W1						0.750
	SDL-202-031-E1W1				0.030	0.020	0.250
	SDL-202-031-E3W1						0.500
	SDL-202-031-E5W1						0.750
	SDL-202-020-E1W2	0.875	0.250	0.375	0.020	0.030	0.250
	SDL-202-020-E3W2						0.500
	SDL-202-020-E5W2						0.750
	SDL-202-031-E1W2				0.030	0.030	0.250
	SDL-202-031-E3W2						0.500
	SDL-202-031-E5W2						0.750

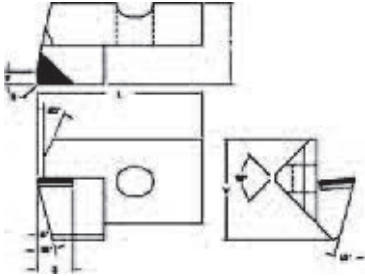

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)

PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45

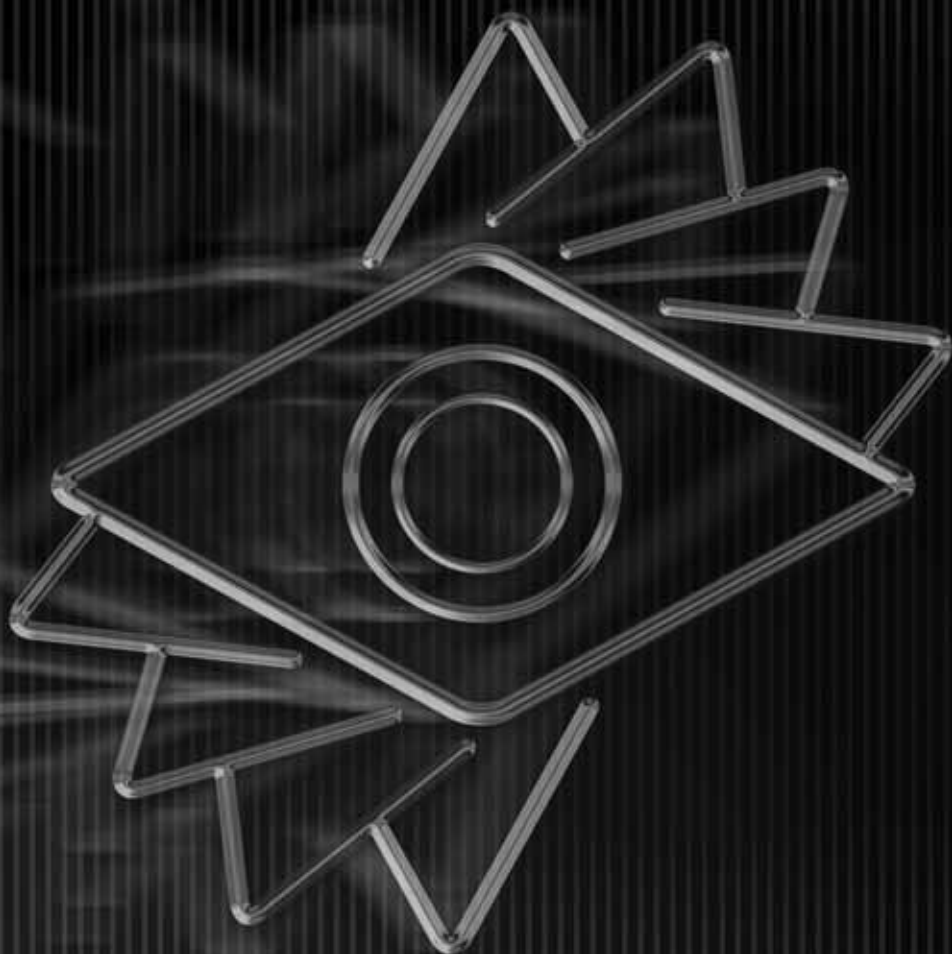
NOTE: Segment size varies based on depth of cut and/ or customers' request

# CARTRIDGE INSERTS

EDR-10X	INSERT NUMBER	DIMENSIONS					
		L	T	W	R	WIPER	EDGE LENGTH
	EDR-100-031-E1	0.875	0.250	0.375	0.030	-	0.250
	EDR-100-031-E3						0.500
	EDR-100-031-E4						0.625
	EDR-100-031-E5						0.750
	EDR-102-031-E1W2					0.030	0.250
	EDR-102-031-E3W2						0.500
	EDR-102-031-E4W2						0.625
	EDR-102-031-E5W2						0.750

UCDR	DIMENSIONS						
	L	T	W	S	X	R	
							
UCDR-11-00		1.236	0.600	0.750	0.265	0.060	0.010
UCDR-11-01						0.060	0.010
UCDR-20-00						0	0.030
UCDR-22-00						0.080	0.030

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)													
PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													



# GW<sup>S</sup>

TOOL GROUP

66 Clark Street  
Welland, Ontario, Canada  
L3B 5W6

6303-76 Ave N.W.  
Edmonton, Alberta, Canada  
T6B 0A7

North American HQ  
595 County Road 448  
Tavares, FL 32778

1 (877) 497-8665  
[sales@gwstoolgroup.com](mailto:sales@gwstoolgroup.com)  
[GWSToolGroup.com](http://GWSToolGroup.com)